

UPDATED SATURN I - GROWTH CONFIGURATION

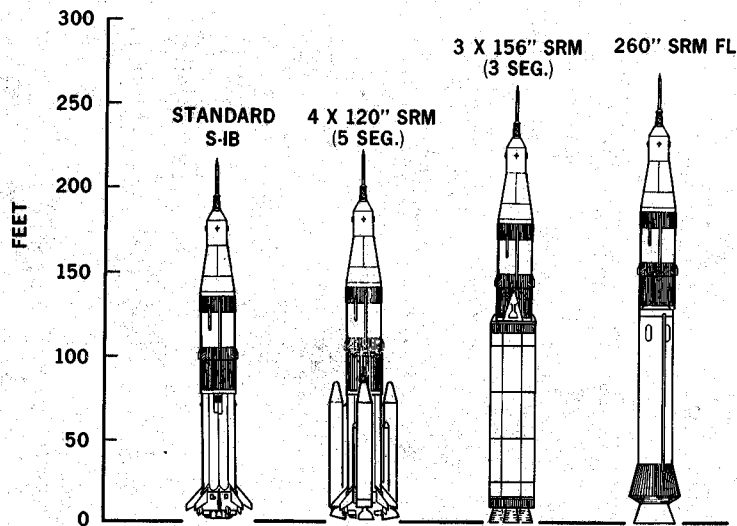


FIGURE 48

UPDATED SATURN I - OPERATING COST

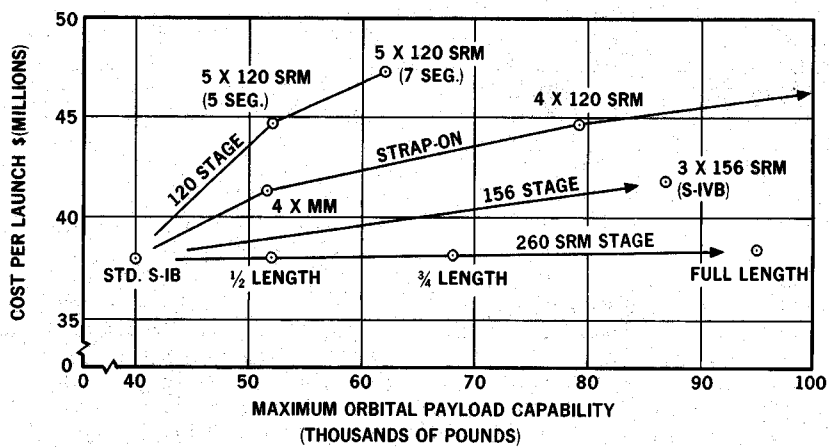


FIGURE 49

tinue to follow the pattern that has been established in the past, the first uprated configuration will utilize strapon booster elements. In the second uprating cycle, solid basement stages comprised of 156- to 260-inch motors will be employed. This uprating option is limited at about 100,000 pounds.